



COFFERDAM - TYPE A (MULTI CARGO BAGS) 1:50

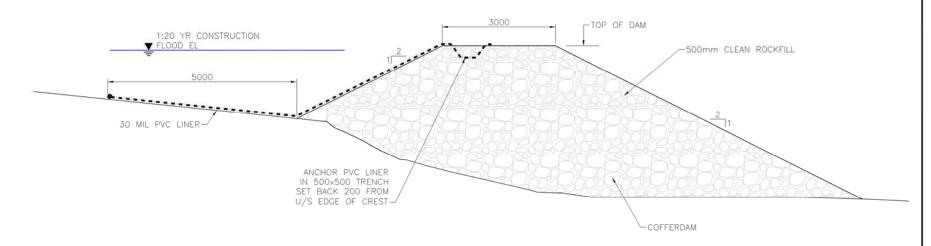

COFFERDAM - TYPE B 1:100

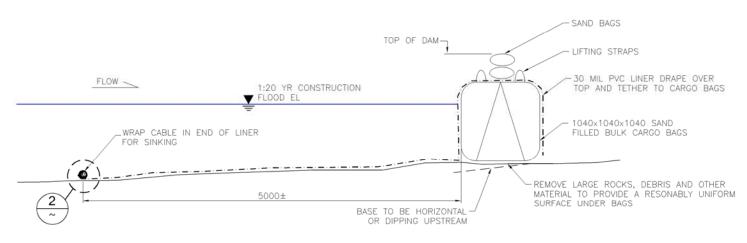

COFFERDAM - TYPE A (SINGLE CARGO BAGS)

-DOUBLE OVER LINER AND PROVIDE 2 WRAPS (MIN) AROUND CABLE -LINER HEAVY-DUTY ZIP-TIES-AT 1000 SPACING

DETAIL (2)

- ALL DIMENSIONS ARE IN MILLIMETRES AND ELEVATIONS IN METRES, UNLESS NOTED OTHERWISE.
- COFFERDAM SHOWN TO ILLUSTRATE CONSTRUCTION DETAILS. INSTALL COFFERDAMS IN SIMILAR FASHION TO THE NECESSARY SIZES AND ELEVATIONS.

 EXERCISE CAUTION WHEN WORKING INSIDE OF COFFERDAM AREAS, ESPECIALLY DURING FLOOD CONDITIONS. EVACUATE WORK AREA IF DESIGN FLOOD LEVEL IS EXPECTED TO BE EXCEEDED.

4. MONITOR COFFERDAMS DAILY TO MAINTAIN INTEGRITY.

	()	1000 500	2000 1000	3000 1500	4000 2000	1:100 1:50		
				MILLIM	METRES				
_		_							
_		-					_	-	-
A	11 05	5 26	FOR REVIEW			СРВ	RJS	DMB	CPB



XENECA POWER DEVELOPMENT INC.

ONTARIO HYDRO PROJECTS GENERAL - PROJECT COFFERDAMS **SECTIONS AND DETAIL**

PRELIMINARY - NOT FOR CONSTRUCTION

1052-001 4.3.080 00-151